

Even Better Stone 39 mm (1,5 inch) absorbent board (density 96 kg/m3) Type A mounting

SOUND ABSORPTION COEFFICIENT PER ASTM C423-09A

Measurement of sound absorption coefficient by the reverberation room method

Report number:

15-251-R2-M10


Date

2016-08-24

Frequency f [Hz]	Sound absorption coefficient α
50	0.00
63	0.05
80	0.11
100	0.18
125	0.35
160	0.59
200	0.67
250	0.64
315	0.64
400	0.58
500	0.59
630	0.69
800	0.83
1000	0.53
1250	0.46
1600	0.56
2000	0.49
2500	0.50
3150	0.48
4000	0.45
5000	0.44

Client: Fellert Acoustical Ceilings AB
 Manufacturer: Fellert Acoustical Ceilings AB
 Product identification: Even Better Stone
 Description of test specimen: 39 mm (1,5 inch) absorbent board (density 96 kg/m3)
 Type A mounting per ASTM E795
 Weight 4,2 kg/m2

Reverberation room volume: 200 m³
 Temperature: 16.1 °C (empty: 16.4 °C)
 Air humidity: 49 % (empty: 53 %)
 Air pressure: 98.5 kPa (empty: 98.4 kPa)
 Size of specimen: 8.93 m²
 Area weight: 10.7 kg/m²
 Measurement date: 2015-12-22
 Measured by: Magnus Karlsson

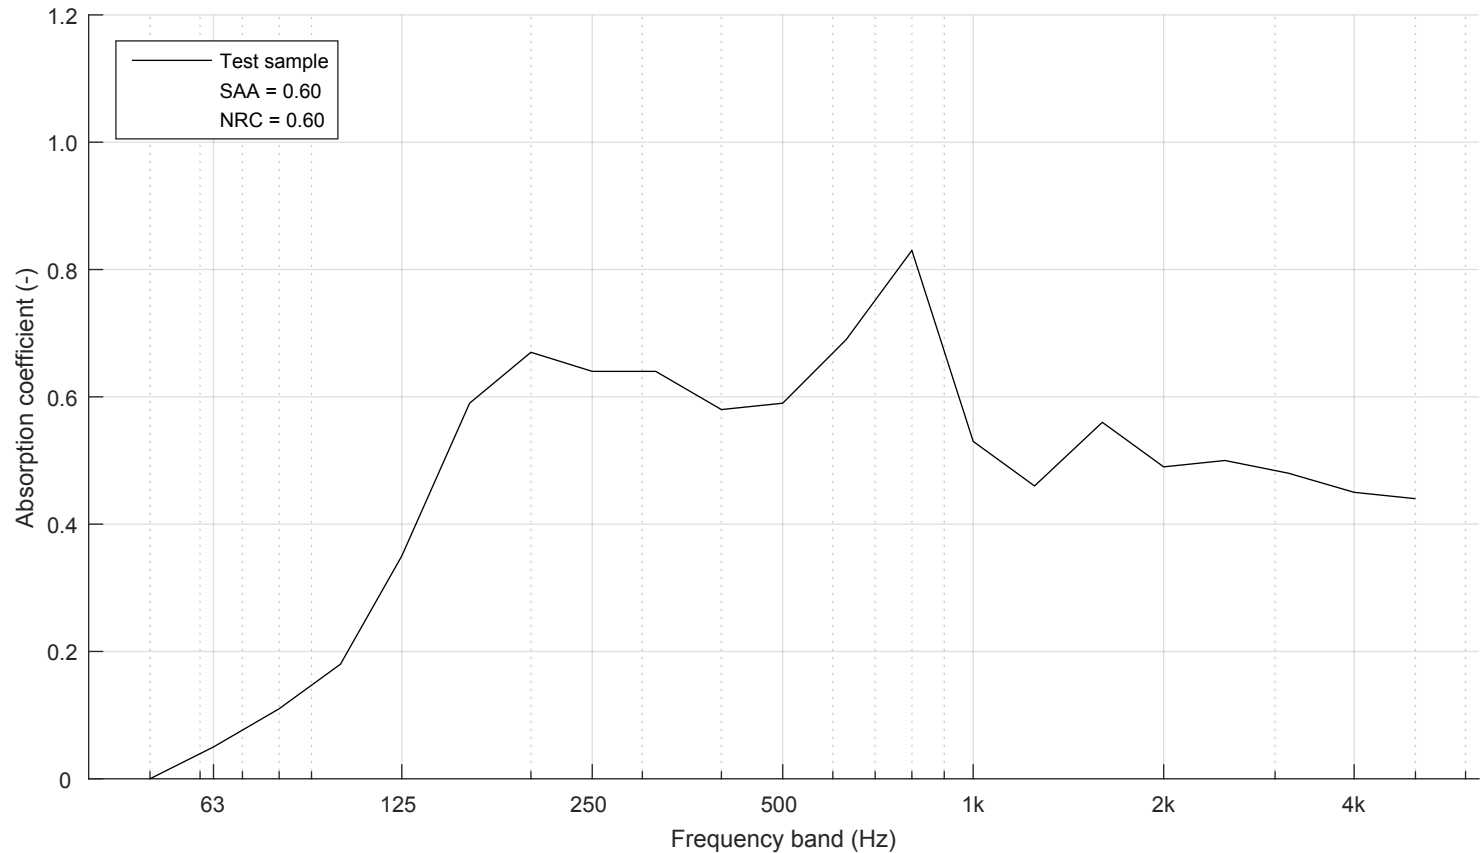

Sound Absorption Average (SAA): 0.60
 Noise Reduction Coefficient (NRC): 0.60